


Meet your data growth requirements and service levels for multiple data types while reducing costs and complexities. Hitachi Unified Storage 100 family provides the only midrange platform storage that can consolidate and manage block, file and object data on a central platform.

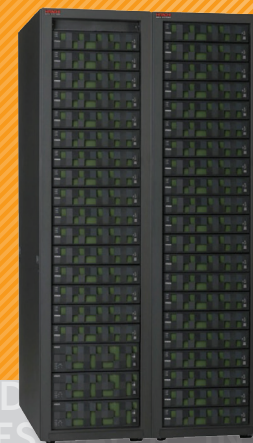

TRANSFORM VIRTUALIZATION ECONOMICS RELIABLE TRUSTED INFORMATI
N GLOBAL CHANGE INTELLIGENT TECHNOLOGY SERVICES GHT OP
TUNITY SOCIAL INFRASTRUCTURE INTEGRATE ANALYZE DISCOVER COMPETITIV

Hitachi Unified Storage 100 Family: Unify Without Compromise

Unified Redefined: Block, File and Object Data on One Platform

Hitachi Unified Storage (HUS) 100 family is an evolution in universally managing block, file and object data (with Hitachi Content Platform), without compromising performance, scalability or cost efficiency. A highly efficient unified architecture allows organizations to satisfy growth requirements and meet business goals while simplifying operations, reducing the total cost structure and quickly adapting to changing storage environments. When combined with Hitachi Command Suite management software, HUS enables optimized and agile data infrastructure.

HUS 100 family provides a balanced approach to scalability that extends investments further. Capacity of a single system can grow to nearly 3PB, while performance can increase linearly and to industry-leading heights. Scale the capacity of data sets with megaLUNs up to 128TB and file systems up to 256TB. Remotely copy all data without limits.

HUS 100 family provides the fastest mid-range storage systems available today for

both block and file access, enabling organizations to achieve performance goals at the lowest possible price. High-end storage functionality, such as autotiering, is available with HUS to facilitate automated placement of data for the highest performance at the lowest cost.

Now all data can be provisioned, managed and archived throughout its lifecycle, consistently and efficiently. HUS promotes faster and easier provisioning of storage for both block and file requirements within virtualized environments, and it provides application-aware data protection for both virtualized and nonvirtualized server environments.

Block storage is accomplished through high-performance, dynamic virtual controllers that simplify provisioning, path management and performance optimization. HUS uses Hitachi Dynamic Provisioning to pool file and block storage with maximum flexibility. File storage relies on a unique, hardware-accelerated, object-based file system. It uses custom FPGAs, which support intelligent file tiering and migration, and virtual NAS functionality, without impeding performance or scalability.

HUS is built on legendary Hitachi reliability for at least 99.999% data availability requirements, with complete system redundancy, hot-swappable parts, outstanding data protection and dynamic virtual controllers. Intelligent automation for failover, load balancing, tiering and migration keeps storage operations up and running at optimal performance. Additional data recovery and protection tools allow for application-aware recovery, simpler backup, restore, failover and consistency across copies, reducing business risk, downtime and migration concerns.

HUS supports myriad operating systems, data types and storage and server environments. It provides integrated solutions for Microsoft®, VMware and Oracle environments.

Business Benefits

Keep Ahead of Data Growth Demands

- Scale system capacity to nearly 3PB without affecting performance.
- Meet performance requirements with a lower investment in storage.
- Automatically correct performance issues and provision more quickly with Hitachi dynamic virtual dual controllers.

- Use Hitachi Dynamic Provisioning to pool and grow file and block storage for maximum flexibility without capacity limitations.
- Leverage 256TB file systems and a single namespace to reduce administrative effort.

Lower Total Cost Structure

- Control rising capital and operational costs with efficient unified architecture.
- Consolidate file, block and object data for extensive cost savings.
- Simplify operations for all data types with one interface and consistent workflows.
- Streamline administration with integrated setup and management.
- Spend less time managing storage and focus on the business.
- Deploy and manage a predictable, scalable and flexible Microsoft environment.

Meet Service Level Agreements (SLAs)

- Meet SLAs with 99.999% data availability and advanced management tools.
- Maximize performance with all SSD configurations.
- Automate data placement for higher performance at lower cost with Hitachi Dynamic Tiering software. Deploy storage solutions that have been validated for application integration.
- Manage storage from an application management portal.
- Perform system maintenance without interrupting host I/Os.

Reduce Downtime and Business Risk

- Dynamically manage replication and backup.
- Meet data security compliance regulations at an affordable cost.
- Utilize crash-consistent snapshots for application-aware backup, recovery and failover.

HITACHI UNIFIED STORAGE (HUS) 100 FAMILY

	HUS 110	HUS 130	HUS 150
Capacity			
Maximum Number (Max. No.) of Drives	120 LFF/120 SFF	360 LFF/360 SFF	960 LFF/960 SFF
Max. Raw Capacity	360TB (3.5" SAS) 108TB (2.5" SAS) 48TB (2.5" SSD)	1,080TB (3.5" SAS) 324TB (2.5" SAS) 144TB (2.5" SSD)	2,880TB (3.5" SAS) 864TB (2.5" SAS) 384TB (2.5" SSD)
LFF (3.5") SAS Drives Supported	3TB, 7200 rpm 2TB, 7200 rpm	3TB, 7200 rpm 2TB, 7200 rpm	3TB, 7200 rpm 2TB, 7200 rpm
SFF (2.5") SAS Drives Supported	300GB, 15k rpm 900GB, 10k rpm 600GB, 10k rpm 300GB, 10k rpm	300GB, 15k rpm 900GB, 10k rpm 600GB, 10k rpm 300GB, 10k rpm	300GB, 15k rpm 900GB, 10k rpm 600GB, 10k rpm 300GB, 10k rpm
SFF (2.5") SAS Flash Drives Supported	400GB 200GB	400GB 200GB	400GB 200GB
Disk Expansion Trays	2U: 24 SFF (2.5") 2U: 12 LFF (3.5")	2U: 24 SFF (2.5") 2U: 12 LFF (3.5") 4U: 48 LFF (3.5") 5U: 84 LFF (3.5")	2U: 24 SFF (2.5") 2U: 12 LFF (3.5") 4U: 48 LFF (3.5") 5U: 84 LFF (3.5")
Block Module			
Height	2U	2U	3U
Controller Cards	1-2 ¹	2	2
Internal Drives	24 SFF (2.5") 12 LFF (3.5")	24 SFF (2.5") 12 LFF (3.5")	N/A
Host Interfaces (FC = Fibre Channel)	FC: 8Gb/sec, iSCSI: GbE or 10GbE	FC: 8Gb/sec, iSCSI: GbE or 10GbE	FC: 8Gb/sec iSCSI: 10GbE
Host Connections per Module	8 FC, 8 FC + 4 iSCSI, 4 iSCSI	16 FC, 8 FC, 8 FC + 4 iSCSI	16 FC, 8 FC, 8 FC + 4 iSCSI, 8 iSCSI
Cache per Module	8GB	32GB or 16GB	32GB
Max. LUN Size	128TB	128TB	128TB
Max. No. of LUNs	2048	4096	4096
RAID Supported	RAID-0, RAID-1, RAID-1+0, RAID-5, RAID-6	RAID-0, RAID-1, RAID-1+0, RAID-5, RAID-6	RAID-0, RAID-1, RAID-1+0, RAID-5, RAID-6
Max. RAID Groups	50	75	200
File Module²			
Supported File Modules	M1, M2	M1, M2	M1, M2
Height	3U	3U	3U
Nodes per Cluster	M1: 1-2; M2: 1-4	M1: 1-2; M2: 1-4	M1: 1-2; M2: 1-4
Random I/O (estimate) ³	M1: 40,137 M2: 72,921	M1: 40,137 M2: 72,921	M1: 40,137 M2: 72,921
Throughput (MB/sec)	M1: 700, M2: 1,100	M1: 700, M2: 1,100	M1: 700, M2: 1,100
File System Size	256TB	256TB	256TB
No. of File Systems	128	128	128
Max. Snapshots	1024 per file system	1024 per file system	1024 per file system
Cache per Node	32GB	32GB	32GB
Protocols	CIFS, NFS, FTP	CIFS, NFS, FTP	CIFS, NFS, FTP
Ethernet Ports	2 x 10Gb, 6 x 1Gb	2 x 10Gb, 6 x 1Gb	2 x 10Gb, 6 x 1Gb

¹Dual controllers required for 99.999% data availability. All block module specifications assume dual controller cards.

²File module specs are per node.

³Based on SPECsfs_2008 NFS benchmarks of equivalent models of Hitachi NAS Platform.

Hitachi Data Systems

Corporate Headquarters

2845 Lafayette Street
Santa Clara, CA 96050-2639 USA
www.HDS.com

Regional Contact Information

Americas: +1 408 970 1000 or info@hds.com
Europe, Middle East and Africa: +44 (0) 1753 618000 or info.emea@hds.com
Asia Pacific: +852 3189 7900 or hds.marketing.apac@hds.com



© Hitachi Data Systems Corporation 2013. All rights reserved. HITACHI is a trademark or registered trademark of Hitachi, Ltd. Microsoft is a trademark or registered trademark of Microsoft Corporation.

Notice: This document is for informational purposes only, and does not set forth any warranty, expressed or implied, concerning any equipment or service offered or to be offered by Hitachi Data Systems Corporation.

DS-226-F DG March 2013